


Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.

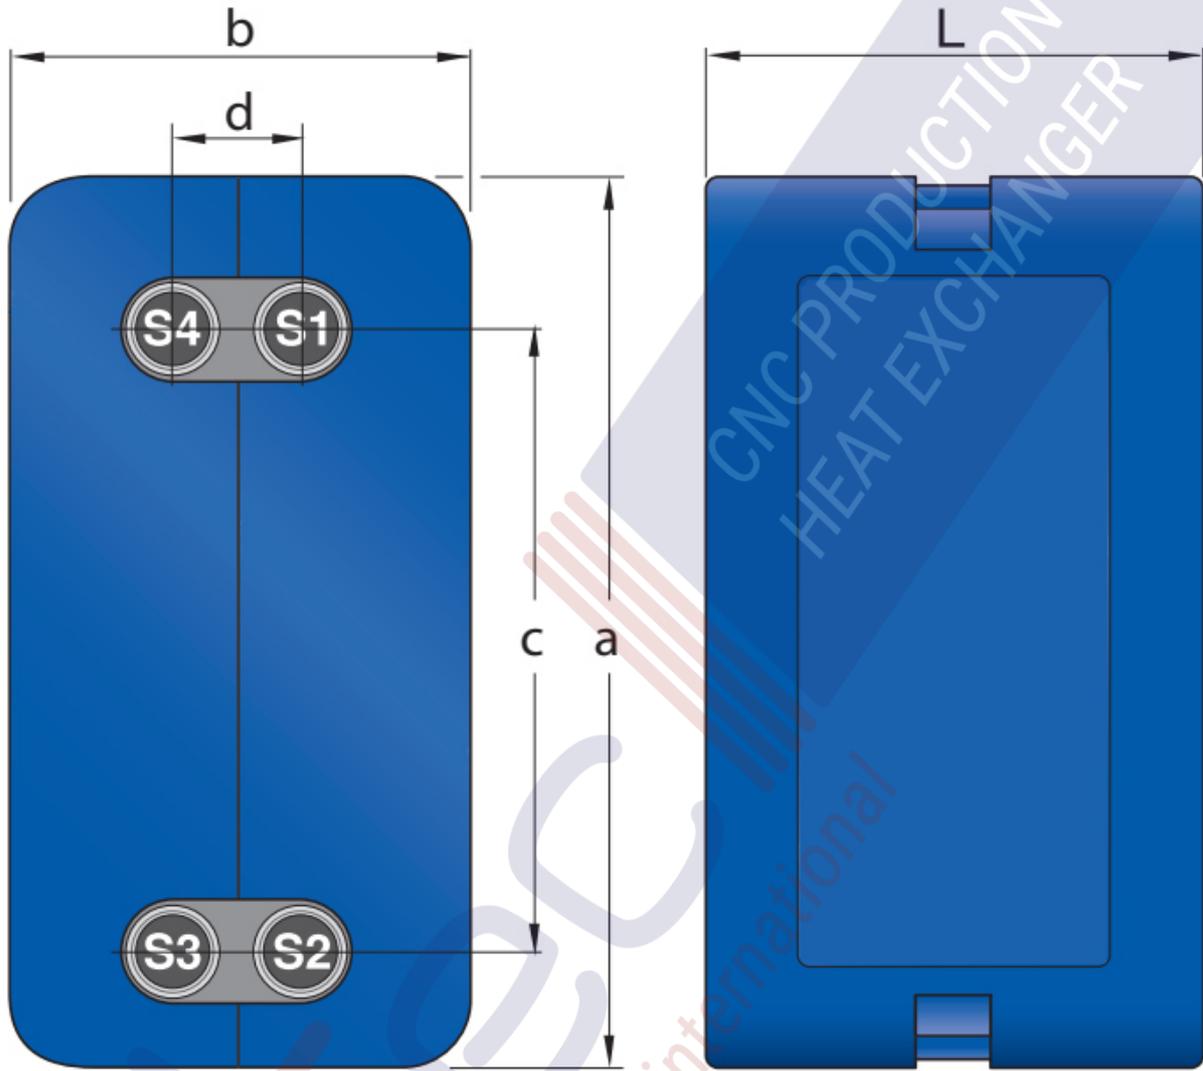

**IN-H max 130°C -Type A**

- Blue plastic cover with CFC-free polyurethane foam
- Thickness 30-50 mm depending on model
- Thermal conductivity: 0.031 w/mK
- Max. temperature: 130°C
- Fire class rating E acc. to EN ISO 11925-2 : 2010

<b>D = HORIZONTAL SPACING</b>	92 mm
<b>C = VERTICAL SPACING</b>	520 mm
<b>L = TOTAL LENGTH</b>	510 mm
<b>B = TOTAL WIDTH</b>	240 mm
<b>A = TOTAL HEIGHT</b>	670 mm
<b>NETWEIGHT</b>	2.88 kg



3236000905

[www.alfalaval.com](http://www.alfalaval.com)

CUSTOMER NAME / REF. NO.

COMPANY / REF.

Aptec production s.r.o.  
Aptec production s.r.o. 64010



12/22/2021  
REV 0