


CNC PRODUCTION  
HEAT EXCHANGER

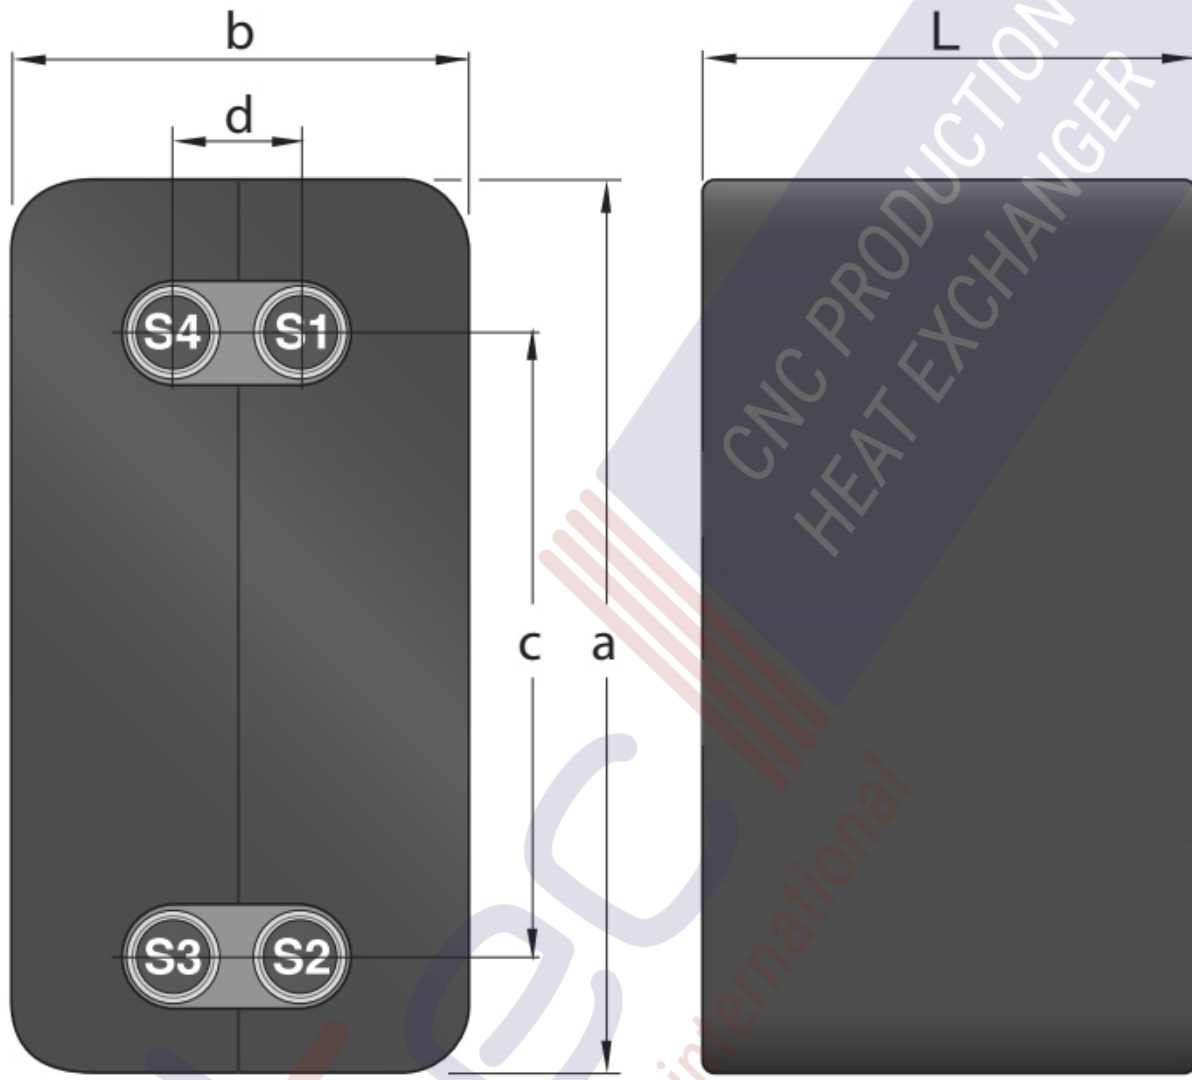

Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.

- IN-H max 110°C -Type B**
- Black EPP - polypropylen (no cover)
  - Thickness 20 mm
  - Thermal conductivity: 0.039 w/mK
  - Max. temperature: 110 °C

|                               |         |
|-------------------------------|---------|
| <b>D = HORIZONTAL SPACING</b> | 46 mm   |
| <b>C = VERTICAL SPACING</b>   | 272 mm  |
| <b>L = TOTAL LENGTH</b>       | 100 mm  |
| <b>B = TOTAL WIDTH</b>        | 137 mm  |
| <b>A = TOTAL HEIGHT</b>       | 366 mm  |
| <b>NETWEIGHT</b>              | 0.15 kg |



3456213801

[www.alfalaval.com](http://www.alfalaval.com)

CUSTOMER NAME / REF. NO.

COMPANY / REF.  
Aptec production s.r.o.  
Aptec production s.r.o. 64010



12/22/2021  
REV 0